

Installation

Aluminium Column Casings Type CC40

Introduction:

These instructions are to be read and fully understood before installation commences.

If there is anything you are not sure about, or if you want to know more about these items, please contact us for clarification.


GA Column Casings are to be installed by suitably qualified contractors with the necessary

knowledge and expertise. Current construction methods are to be used.


The contractor, has the responsibility and duty to ensure proper safety during and after completion of the installation, so that the GA Column Casings remain safely secured to attached surfaces.

These products are not intended to have electrical wiring installed. Where this is a requirement, the specifier and installer should ensure that all electrical safety regulations have been complied with.

Please also refer to our Health and Safety Data Sheet for additional guidance.

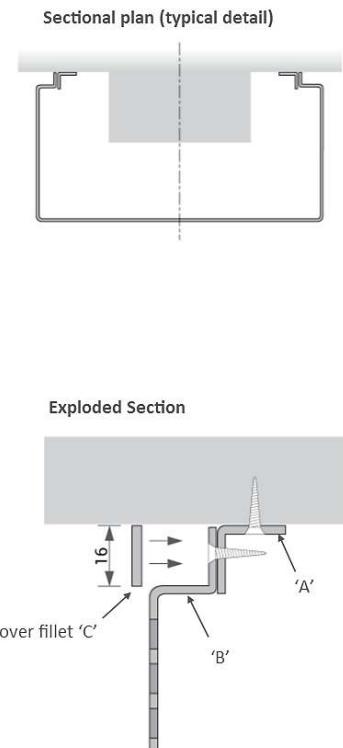

N.B. Measurements shown in mm.

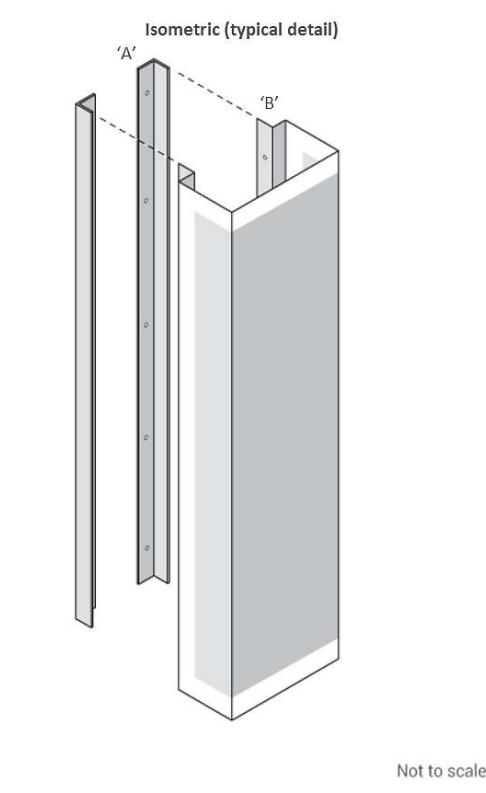

Installation:

Unpack the items and ensure they are in good condition.

Locate and fit the fixing brackets 'A' to the existing structure (fixings supplied by others).

Position pre-drilled casing flange 'B' over angle fixing brackets 'A'. Using the pre-drilled holes as a guide, drill 3mm dia. pilot holes.

Screw-fix the casing 'B' to the continuous brackets 'A', using the csk. self-tapping screws (provided).

Bond the optional cover fillet 'C' into position with a suitable cartridge adhesive (supplied by others).