

Installation

Wall Cladding Panels (for Interiors) Type WC3

1

Introduction:

These instructions are to be read and fully understood before installation commences.

If there is anything you are not sure about, or if you want to know more about these items, please contact us for clarification.

GA Wall Cladding Panels together with the GA Panel-Fix system, are to be installed by suitably qualified contractors with the necessary knowledge and expertise. Current construction methods are to be used.

The installation contractor has the responsibility and duty to ensure proper safety, so that during and after completion of the installation, the GA Panel-Fix system remains properly secured both to the supporting structure and to the attached wall cladding panel.

To ensure this fixing system is suitable for the intended application, please refer to the load bearing capacity Test Results (Table 16) on our website page for this product. Also, refer to our Health & Safety Data Sheet for additional guidance on off-loading, site storage, etc.

These products are not intended to have electrical wiring installed. Where this is a requirement, the specifier and installer should ensure that all electrical safety regulations have been complied with.

Installation:

Unpack the items and ensure they are in good condition.

Check the aluminium panels are safely secured to the core (infill) panel (provided by others).

The GA Panel-Fix system consists of two J-Section profiles, one of which, inverted, is secured (through the pre-drilled No.8 csk. holes) to the rear of the infill panel to be suspended, and the other to the supporting structure. The inverted section, fixed to the rear of the panel, then slots into the section attached to the supporting structure, to complete the installation.

A balanced stable fixing of the suspended panel normally requires at least two sets or pairs of profiles running horizontally along the full panel width. Sometimes additional horizontal pairs of profiles are required to ensure a satisfactory fitting of the suspended panel.


N.B. All fixings are supplied by others.

Please refer to the installation drawings on the next page >

Installation

Wall Cladding Panels (for Interiors) Type WC3

2

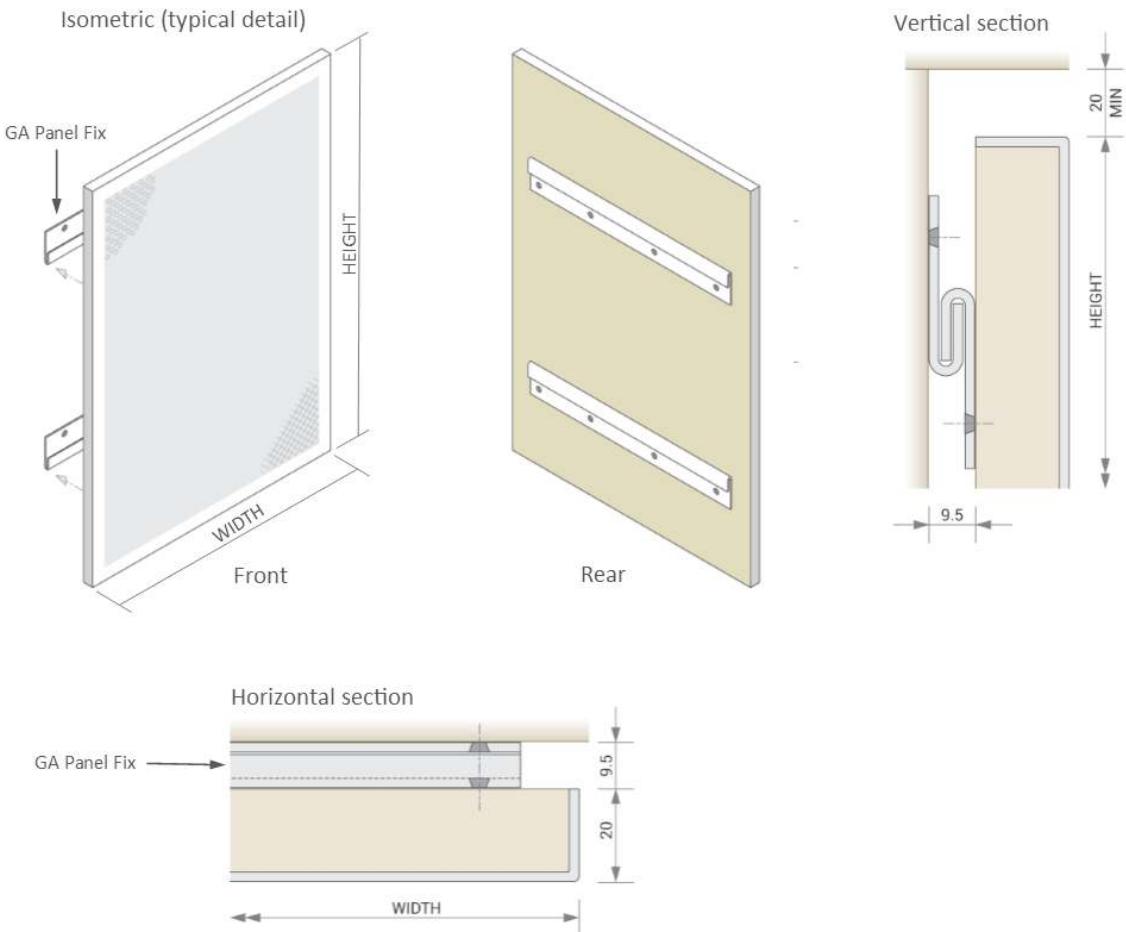

N.B. Measurements shown in mm.